


Extremely low vibration achieved by ...

AVT
ANTI VIBRATION TECHNOLOGY




1 Damper spring

absorbs reaction force of impact energy.

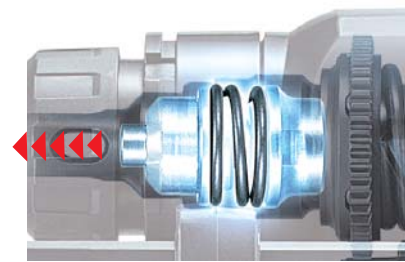


2 Counterweight mechanism

reduces vibration by moving a counterweight in the opposite direction of the piston.

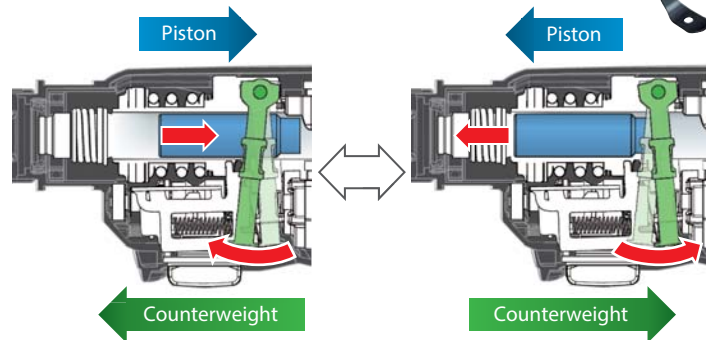

Detachable Dust collection system

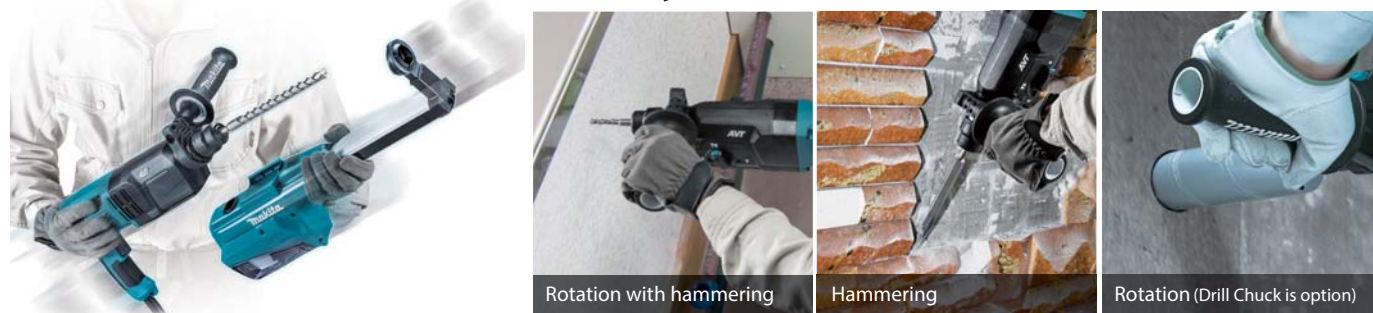

Combination Hammer with Self Dust Collection

HR2650 / HR2651T 26 mm (1"), Adapted for SDS-PLUS bits

325

- Double Insulation
- Variable Speed
- Reversing
- SDS-PLUS Shank
- Torque Limiter
- Dust Collection
- Carrying Case

**Continuous rating input
Impact Energy**

Capacity

- Blows Per Minute (BPM)**
- No Load Speed (RPM)**
- Sound Pressure Level**
- Sound Power Level**
- Vibration Level**
- Dimensions (L x W x H)**
- Net weight**
- Power supply cordz**

HR2650

800W
EPTA-Procedure 05/2009: 2.4 J
Our experimental conditions: 2.9 J
Concrete: 26 mm (1")
Core Bit: 68 mm (2-11/16")
Diamond Core Bit (Dry Type): 80 mm (3-1/8")
Steel: 13 mm (1/2")
Wood: 32 mm (1-1/4")
0 - 4,600
0 - 1,200
91 dB(A)
102 dB(A)
Hammer Drilling Into Concrete: 12.5 m/s²
604x89x228 mm (23-3/4"x3-1/2"x9")
3.0 - 4.1 kg (6.7 - 9.1 lbs.)
2.5 m (8.2 ft.)

HR2651T

800W
EPTA-Procedure 05/2009: 2.4 J
Our experimental conditions: 2.9 J
Concrete: 26 mm (1")
Core Bit: 68 mm (2-11/16")
Diamond Core Bit (Dry Type): 80 mm (3-1/8")
Steel: 13 mm (1/2")
Wood: 32 mm (1-1/4")
0 - 4,600
0 - 1,200
92 dB(A)
103 dB(A)
Hammer Drilling Into Concrete: 11.5 m/s²
630x89x228 mm (24-3/4"x3-1/2"x9")
3.2 - 4.4 kg (7.1 - 9.7 lbs.)
2.5 m (8.2 ft.)

Standard Equipment: Side Grip, Depth Gauge, Sealing Cap

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : salesadv@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE

Item code : Z-10367

PRINTED IN SINGAPORE



Combination Hammer with Self Dust Collection System
HR2650 / HR2651T
26 mm (1"), SDS-PLUS bits



SDS-PLUS Shank

**Combination Hammer
with Self Dust Collection System**



Photo : HR2650

CLEAN HEPA filter

**Dust Collection System
Equipped with HEPA Filter**

HR2650



HR2651T



AVT
ANTI VIBRATION TECHNOLOGY





Photo : HR2651

Equipped with HEPA Filter

which removes particles with an efficiency rating of 99.75% from the air passing through.

HEPA filter




Filter Part No. 196165-5(EU)

Filter plate


Filter plate is engineered to prevent debris entering into motor when using without dust collection system



High dust collection performance for overhead application

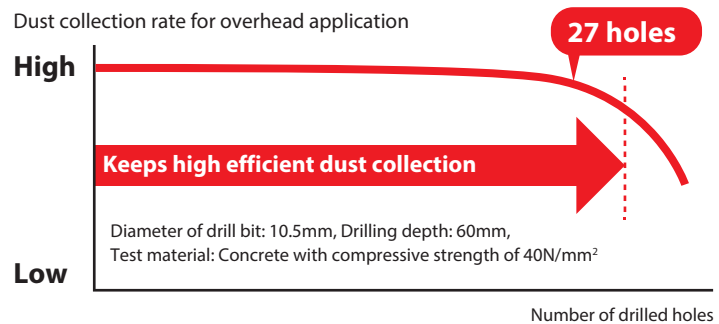

Large Fan Provides Incredibly High Dust Extraction Power



High rotation speed
20,900
min⁻¹

Enables to accept longer drill bits

Adjustable drilling depth

Telescopic guide also functions as a depth gauge. A desired drilling depth can be adjusted simply by sliding a push button on the guide to the desired point.



Position adjustment of Dust Extraction Inlet

one action adjustment according to bit length simply by pushing a single push button



Secure connection

between dust case and dust collecting section allows for less dust leakage

Easy disposal of dust and easy cleaning of dust case

- Dust case cover is easy to open/close with a single operation of a locking tab
- Wide opening of dust case



Dust case Part No. 198982-9

Transparent dust case for easy checking of collected dust amount