



40Vmax series movie



40Vmax mechanism movie



This movie was filmed in Japan. Models and specs may vary by country.



Satisfy Professional's Needs



Cordless Demolition Hammer
HM001G Adapted for SDS-MAX bits



High Power
Durability
Digital Communication

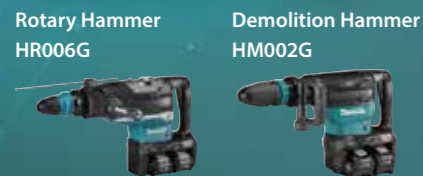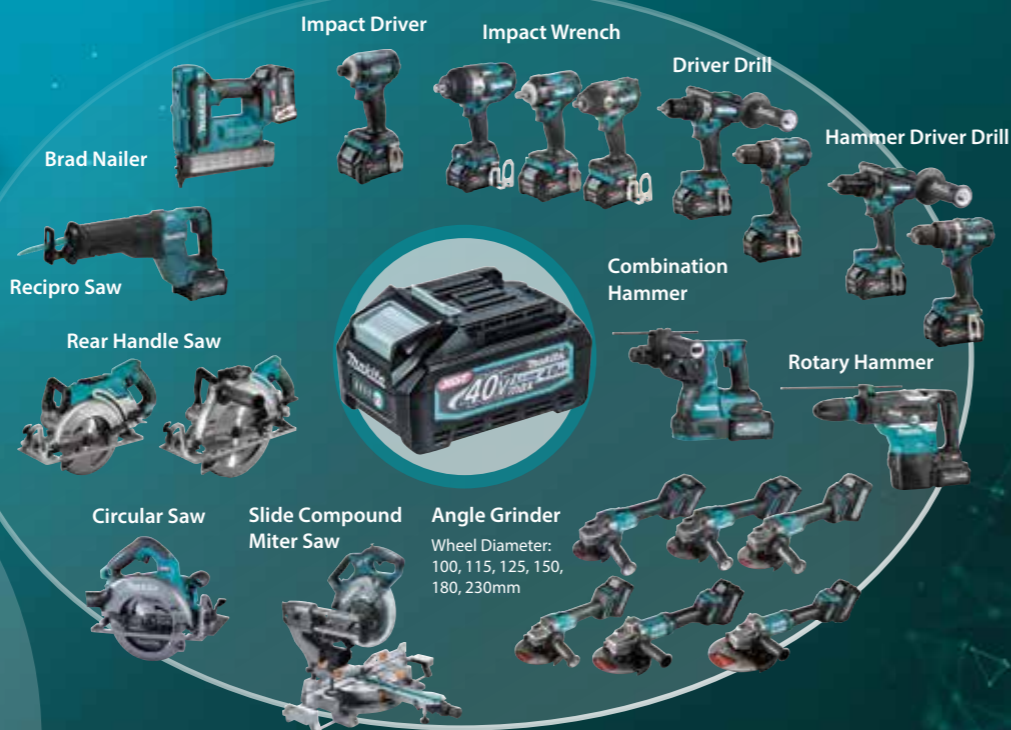

Impact energy
[EPTA-Procedure 05/2009]
9.4
Joule

Portable Power Pack


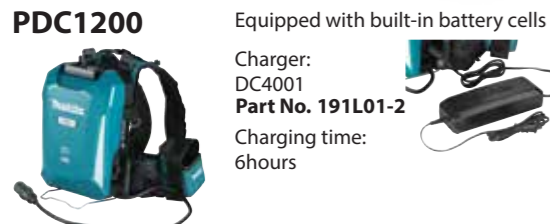


photo: HR005G

Accessories

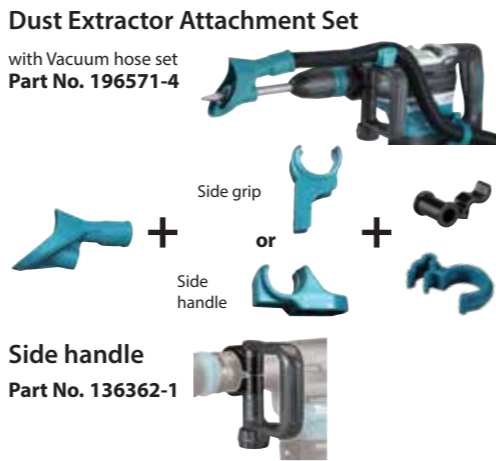

Charging Time Reference

	DC40RA (191E08-6) <small>Fast Charging</small>	DC40RC (191M92-9)
	45min	67min
	50min	85min

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Cordless Demolition Hammer		
HM001G Adapted for SDS-MAX bits		
	Variable Speed	Impact Energy EPTA-Procedure 05/2009: 9.4 J
	SDS-MAX Shank	Blows Per Minute (BPM) 0 - 2,650
	Constant Speed	Shank Diameter 18 mm (11/16")
	Soft Start	Sound Pressure Level 89 dB(A)
	Built-in Job Light	Sound Power Level 100 dB(A)
	Carrying Case	Vibration Level Chiselling Function w/ Side Handle: 6.0 m/s ² Chiselling Function w/ Side Grip: 5.5 m/s ²
		Dimensions (L x W x H)
		w/ BL4040: 496 x 113 x 258 mm (19-1/2 x 4-7/16 x 10-1/8")
		w/ BL4050F: 516 x 113 x 280 mm (20-1/4 x 4-7/16 x 11")
		Net weight
		6.3 - 7.1 kg (13.9 - 15.7 lbs.)
Standard Equipment: Bull Point, Bit Grease, Side Grip (country-specific), Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Cloth, Battery, Charger		



Higher power than corded tools

Makita Singapore Pte Ltd
7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE

PRINTED IN SINGAPORE




Impact energy
[EPTA-Procedure 05/2009]
9.4
Joule

HM001G	9.4 Joule
AC tools	8.1 Joule

Anti-Vibration Technology

Vibration level at main handle
AVT **6.0 m/s²**

Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.

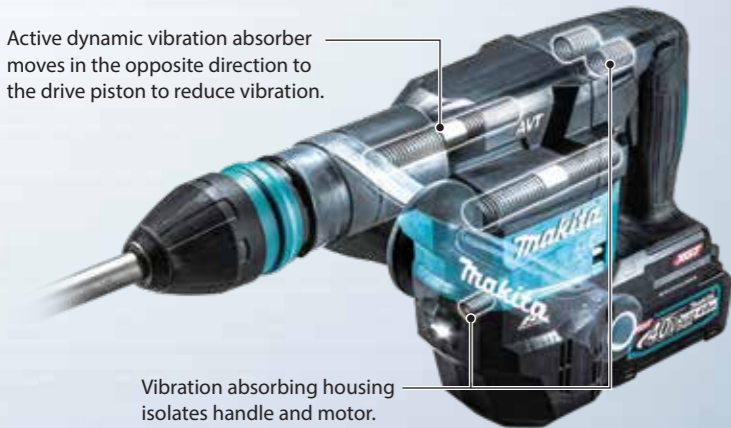

Vibration absorbing housing isolates handle and motor.

SOFT NO LOAD

Suppression of motor speed during no-load



BL MOTOR High power Brushless motor




Work amount
Chipped concrete and measured the amount of concrete removed / Concrete with compressive strength of 40N/mm²
about **20% UP**
with BL4040



AWS Auto-start Wireless System


connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

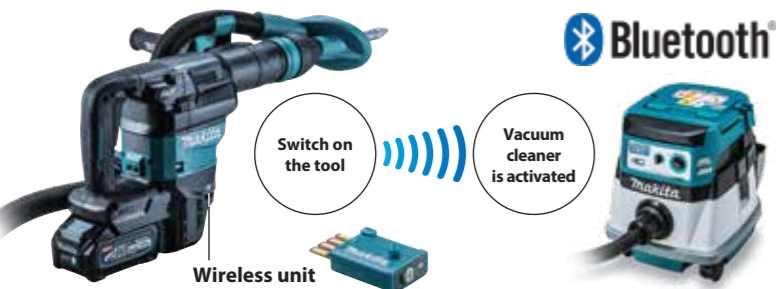

XPT eXtreme Protection Technology



Adapted for SDS-MAX bits
12 bit angle settings

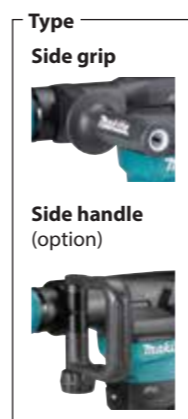

Slide lever for trigger lock-on / lock-off
Trigger lock-on/lock-off can be set simply by pushing the slide lever:
• For lock-on of the trigger, pull and hold the trigger, then push the slide lever.
• For lock-off of the trigger, push the slide lever without pulling the trigger.

5-stage max speed selection by dial with variable control by trigger in each range enables user to match the speed to the application for greater versatility.