



Accessories

Adapter pipe 85-72 set

Part No. 191L96-5



Flat nozzle set

Part No. 197889-6
Narrow profile improves air speed for removing heavier debris such as wet leaves



Gutter nozzle set

Part No. 191B03-8



Band assembly set

Part No. 191J48-4



Portable Power Pack

Portable Power Pack

PDC1200



Charger
DC4001
Charging time:
6 hours



Battery Powered

Blower
UB001C



Lawn mower
LM001C

Grass Trimmer
UR101C
UR201C
UR202C



Adapter set

40Vmax

Part No.
191N62-4



Adapter between Battery box of Portable power pack and Product on 40Vmax XGT platform

18Vx2

Part No.
191J51-5



Adapter between Battery box of Portable power pack and Product on 18Vx2 LXT platform

18V

Part No.
191J50-7



Adapter between Battery box of Portable power pack and Product on 18V LXT platform
*PDC01 only

PDC01



Powered by up to four 18V LXT batteries

Battery Powered Blower

UB001C

- Variable Speed
- Constant Speed

Standard Equipment:

Shoulder Belt, End Nozzle, Flat Nozzle (country-specific), Extension Nozzle (country-specific), Adapter Pipe (country-specific)

Max Air Volume	Cruise Control Mode: 0 - 15.0 m ³ /min Boost Mode: 17.6 m ³ /min
Max Air Velocity	Cruise Control Mode: 0 - 60 m/s Boost Mode: 70
Avg. Air Velocity	Cruise Control Mode: 0 - 50 m/s Boost Mode: 58
Blowing Force	Cruise Control Mode: 0 - 15.0 Boost Mode: 20.0
No Load Speed (RPM)	Cruise Control Mode: 0 - 21,000 Boost Mode: 24,000
Sound Pressure Level	83.4 dB(A)
Sound Power Level	91.4 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	960 - 1,060 x 295 x 180 mm (37-3/4 - 41-3/4 x 11-1/2 x 7")
Net weight	2.6 - 2.9 kg (5.7 - 6.5 lbs.)

Weight according to EPTA-Procedure 01/2014

Items of standard equipment and specifications may vary by country or area.

Portable Power Pack

PDC1200 / PDC01

	PDC1200	PDC01
Capacity	33.5 Ah	24 / 12 Ah
Energy Capacity	1,206 Wh	432 Wh
Number of Cells	100	-
Charging Time (hours)	6	-
Dimensions (L x W x H)	w/o Harness: 369 x 261 x 139 mm (14-1/2 x 10-1/4 x 5-1/2") w/ Harness: 428 x 261 x 164 mm (16-7/8 x 10-1/4 x 6-1/2")	400 x 195 x 132 mm (15-3/4 x 7-5/8 x 5-3/16")
Net weight*	8.8 kg (19.4 lbs.)	w/o battery: 2.8 kg (6.1 lbs.)

*not covered by EPTA-Procedure

Standard Equipment: PDC1200: Harness, Adapter for 36V (18V x2) [countries-specific], Charger

PDC01: Harness, Adapter [countries-specific]



Battery Powered Blower UB001C Portable Power Pack PDC1200 / PDC01



Ideal for long hours of work

Continuous run time (approx)
on a full battery charge
with PDC1200

90 min

Variable speed control mode: 0-max

UB001C

Powerful blowing force

Max 20 N*

*Boost mode



Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE

PRINTED IN SINGAPORE



UB001C



UB001C / PDC1200



1,200Wh high capacity

Portable Power Pack
PDC1200

Height-adjustable waist belt

The position of the waist belt can be adjusted for personal fit and comfort.



Quickly removable harness

can be attached/removed from the main unit with a single action.



Reflectors


keep operator visible from a distance even in the dark.



4-LED fuel gauge
indicates the battery status by four green LEDs.
(turns on with a push of the main power switch.)

Low noise level

Smoother airflow, which is achieved by redesigning the position of controller and the air intake port, decreases noise while increasing blowing force.



Variable speed control by trigger, with Cruise control lever



Cruise control lever allows you to lock the variable speed control trigger at a desired power level.

Best grip-to-frame angle

Stand

Hole on the bottom of housing for hanging

Battery Powered Blower **UB001C**

Boost mode



- In Boost mode, 20N max blowing force is always available.
- Usage time of Boost mode is restricted to protect the machine.
Available operation time in boost mode, under environment temperature of 25°C

Battery	Available operation time	
	Time per run*1	Cumulative operation time*2
PDC1200	5 min	60 min
PDC01 (BL1860Bx4)	5 min	17 min

*1 Max time per run is at least 30 seconds or longer and depends on usage environment.
*2 Total operation time when the machine was intermittently used in Boost mode only.



Easy-to-hold machine bottom design for added comfort and control in double handed operation



Portable Power Pack
PDC01

Backpack harness

can be detached from the battery box, allowing for use as a stationary power pack.



Fuel gauge for each battery
indicates the battery status by two green lamps.

Main power switch
with auto-off function

Powered by up to four 18V LXT batteries




Battery cover
protects batteries from water and dust.

Height-adjustable waist belt
The position of the waist belt can be adjusted for personal fit and comfort.

Less user fatigue as well as more powerful air flow

Nozzle is designed so that its end points downward. This small change can displace the reaction force towards the handle side to minimize the return tilting action of the machine, reducing user's arm fatigue.

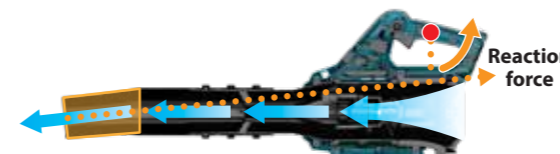

36V high power drive system using the Makita portable power pack

Up to four batteries can be carried on user's back, enabling long continuous operation while providing more lightweight tool body.

3-stage telescopic long nozzle with an adjustment range of 100mm (4")



WG WET GUARD UB001C / PDC1200 only
High water-resistance allows to operate the machine even if it is wet with water.

