



Cordless Fan
CF002G 40Vmax / AC
DCF301 18V / AC



Quiet & powerful wind for large workspaces



40V LITHIUM-ION
max

18V LITHIUM-ION



Noise [at max air speed]

52 dB(A)

Max air speed

240 m/min

Fan diameter

ø330 mm

Designed for reduced wind noise level for quiet operation

Quiet fan

thanks to minimum increase in rotation speed of the motor, which is achieved by:

- Inventive fan blades designed to create high air speed at low rotation speed.
- Fan cover with spiral fan guard that can keep the air flow strong.



Noise
[at max air speed]
52 dB(A)

Easy-to-clean-up fan blades

Front cover is removable simply by removing a single screw, allowing for convenient clean up.



photo: CF002G

CF002G



DCF301



Features

Automatic oscillation



Left / Right 45°

Adjustable fan head angle




Up 90°, Down 45°,
Left / Right 90°

AC adapter jack



Carrying handle

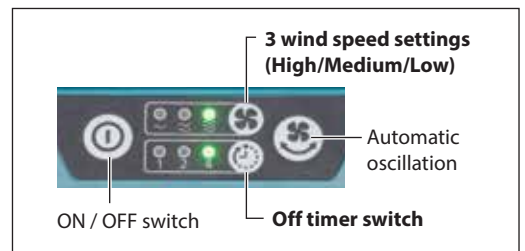

Continuous use (approx.)

on a full battery charge: min / Without oscillation

| | High | Medium | Low |
|----------------------------|------------|------------|--------------|
| CF002G (BL4040) | 320 | 640 | 1,020 |
| DCF301 (BL1860B) | 215 | 430 | 850 |

Cordless Fan

CF002G 40Vmax / AC / DCF301 18V / AC

| | CF002G | DCF301 |
|--|---|--|
| Electronic 3-Speed | | |
| Continuous Use (min.) w/o oscillation | w/ BL4040 Low / Mid / High: 1,020 / 640 / 320 | w/ BL1860B Low / Mid / High: 850 / 430 / 215 |
| Continuous Use (min.) w/ oscillation | w/ BL4040 Low / Mid / High: 970 / 610 / 305 | w/ BL1860B Low / Mid / High: 815 / 415 / 210 |
| Max Air Velocity | High / Mid / Low: 240 / 170 / 120 m/min | High / Mid / Low: 240 / 170 / 120 m/min |
| Air Flow | High / Mid / Low: 21 / 15 / 10 m ³ /min | High / Mid / Low: 21 / 15 / 10 m ³ /min |
| Noise level | 52 dB(A) | 52 dB(A) |
| Fan Diameter | 330 mm (13") | 330 mm (13") |
| Dimensions (L x W x H) | w/ BL4040: 277 x 439 x 602 mm (10-7/8 x 17-1/4 x 23-3/4") | w/ BL1860B: 269 x 439 x 602 mm (10-5/8 x 17-1/4 x 23-3/4") |
| Net weight | 3.8 - 5.1 kg (8.4 - 11.2 lbs.) | 3.8 - 4.5 kg (8.4 - 9.9 lbs.) |

Standard Equipment :
AC Adaptor

The weight may differ depending on the attachment(s), including the battery cartridge.
Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE

PRINTED IN SINGAPORE