



# Cordless Impact Driver DTD157



**Slim body  
thanks to  
compact BL motor**

Bit is option



Max Fastening Torque  
**140N·m**





Bit is option

### Anti-bit wobbling structure

- Two ball bearings are used to securely hold the anvil for reduced bit wobbling.
- Despite the internal design change for the rigidity, redesigned gear section makes the overall length 2mm shorter than Predecessor Model.

### Slim body

Compact housing sizes around the motor allow for easy screwdriving in tight corners.



### Best possible ergonomic handle for screwing applications




- A** In order to provide maximum thrust to the bit, the top back of the handle is ergonomically contoured and widened to perfectly fit the U-shape formed between user's thumb and index finger.
- B** Ribbed soft grip enables all finger tips to hold the handle securely against the strong rotational force of counter torque even in single-handed operation.

### Impact power selection

Hard / Soft impact modes



**A-mode (Assist mode)**  
for controlled screwdriving

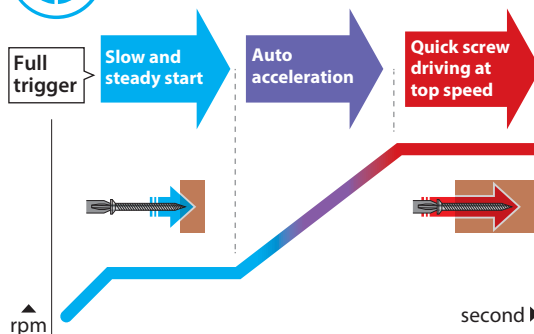

### Accessories

#### Tool hanger set

Part No.  
191K57-9



### Aluminum hammer case

### Twin LED job light



with preglow and afterglow functions

### Variable speed switch



### Belt clip

**BL MOTOR XPT**

### Charging Time

	DC18RC	DC18SD
<b>BL1815N</b> 1.5Ah	15 min	30 min
<b>BL1830B</b> 3.0Ah	22 min	60 min
<b>BL1850B</b> 5.0Ah	45 min	110 min
<b>BL1860B</b> 6.0Ah	55 min	130 min

### Cordless Impact Driver

#### DTD157

- Variable Speed
- Brake
- Reversing
- Electronic 2-Speed
- Built-in Job Light
- Carrying Case

#### Capacity

Machine Screw:	M4 - M8 mm (5/32 - 5/16")
Standard Bolt:	M5 - M14 (3/16 - 9/16")
High Strength Bolt:	M5 - M12 (3/16 - 1/2")
Coarse thread (in length):	22 - 90 mm (7/8 - 3-1/2")
6.35 mm (1/4")	
<b>Hex Shank</b>	
<b>No Load Speed (RPM)</b>	Hard / Soft: 0 - 3,000 / 0 - 1,300
<b>Impacts Per Minute (IPM)</b>	Hard / Soft: 0 - 4,100 / 0 - 2,000
<b>Max Fastening Torque</b>	140 N·m (1,240 in.lbs.)
<b>Vibration Level</b>	Impact tightening of fasteners of the maximum capacity of the tool: 11.5 m/s <sup>2</sup>
<b>Sound Pressure Level</b>	95 dB(A)
<b>Sound Power Level</b>	106 dB(A)
<b>Dimensions (L x W x H)</b>	w/o Battery: 133 x 81 x 185 mm (5-1/4 x 3-3/16 x 7-1/4") w/ BL1830B / BL1840B / BL1850B / BL1860B: 133 x 81 x 232 mm (5-1/4 x 3-3/16 x 9-1/8")
<b>Net weight</b>	1.2 - 1.5 kg (2.6 - 3.3 lbs.)

Standard Equipment: Belt Clip, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

### Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE

PRINTED IN SINGAPORE