



Cordless Worklight  
ML003G



**40V** Li-ion  
**max**

High-intensity  
LED light for  
large workspaces

Luminous flux:

Max. 1,100 lm



Continuous run time\*

High Low

10 / 22 hour

Dust and water resistance

IP65



\*on a single full battery charge, Battery : BL4040



Switch

Compact design with a short height thanks to the retractable carrying handle



## 240°


Knob for free adjustment of light angle enables the light source to rotate from -30° to 210° to a desired angle.

### Applicable battery




- BL1815N
- BL1820B
- BL1830B
- BL1840B
- BL1850B
- BL1860B

- BL4020
- BL4025
- BL4040
- BL4050F

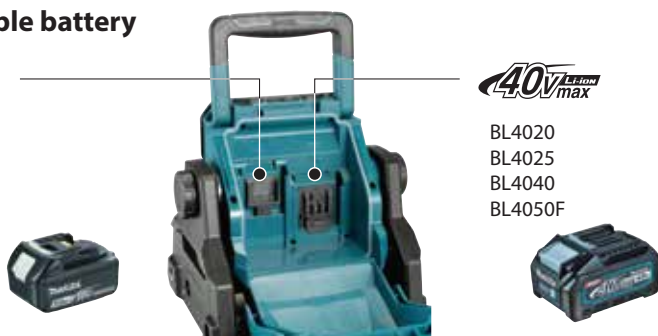

### Mode memory function for convenience in brightness setting

High/Low brightness setting is controlled by operation of a single purpose switch, which can memorize a previous brightness mode, enabling the worklight to resume illumination at the same mode as last time user turned off.

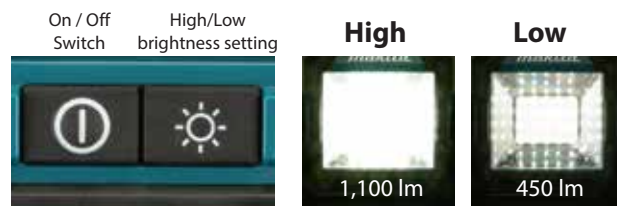

Dust and water resistance

# IP65

For use in outdoor applications or harsh environments

		Light source	
Type: LED 20pcs x 0.6W		High	Low
Illuminance *1		500lx	200lx
Luminous flux		1,100lm	450lm
Continuous run time*2		10h	22h

\*1 at 1m from the light source  
\*2 on a single full battery charge, Battery : BL4040

### Battery capacity warning function

automatically notifies about reduction in battery capacity with the decrease of Illuminance (Only one LED is on notification)

1. Full brightness, with all LEDs on.
2. Only one LED is on as the picture below. (This will continue about five to ten minutes in case of using battery.)
3. All LEDs turn off.



### Accessories

#### Tripod

Up to two ML003G's can be mounted.  
Height : 1,300-2,000mm  
Set Screw : M8  
Part No.  
GM00002073

#### Vise

Part No.  
GM00001396

#### Anti-glare film

Part No.  
GM00002312



### Cordless Worklight

#### ML003G

<b>Run Time (hrs)</b>	Up to: 22 (Low mode, with BL4040)
<b>Illuminance (High / Low)</b>	
at 1m from the light source:	500 / 200 lx
at 0.5m from the light source:	1,900/ 800 lx
<b>Luminous Flux (High / Low)</b>	1,100 / 450 lm
<b>Dimensions (L x W x H)</b>	w/ Handle in Retracted Position: 249x298x280mm (9-3/4"x11-3/4"x11") w/ Handle in Upright Position: 249x298x386 mm (9-3/4"x11-3/4"x15-1/4")
<b>Net weight</b>	3.7 - 4.7 kg (8.2- 10.4 lbs.)

**Standard Equipment :** Battery & Charger Sold Separately

The weight does not include battery cartridge.  
Items of standard equipment and specifications may vary by country or area.

## Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE