



Rechargeable Multi Line Laser SK700GD / SK700D




3 x full 360-degree lines for quick and easy setup




SK700GD

Green



SK700D

Red



Long continuous operation
(approx.)

	SK700GD	SK700D
BL1016	5 h	8 h
BL1021B	7 h	11 h
BL1041B	14 h	22 h






High visible green lines (SK700GD only)


3 x full 360-degree laser lines

Full 360-degree line is created by letting the laser from a light source reflect on a cone mirror.

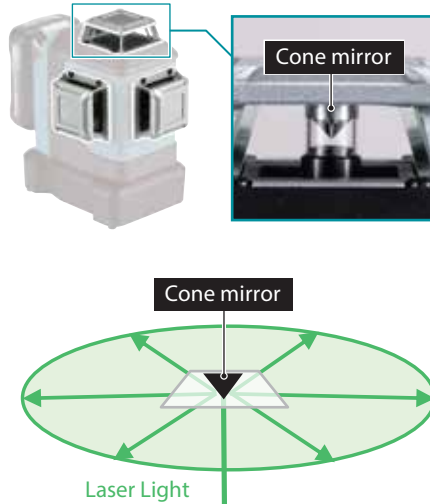

Rotary base with eccentric rotation mechanism

- Reduces setup time.
- Vertical laser lines can rotate around the defined plumb point up to 10° left and right (with a dial for fine adjustment).
- Eccentric rotation mechanism enables the laser body to rotate without changing the position of the defined plumb point, enabling easy line positioning.

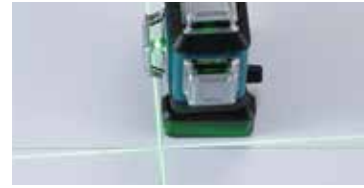


dial for fine adjustment

Switch

Line beam mode selection



Laser line selection and on / off switch

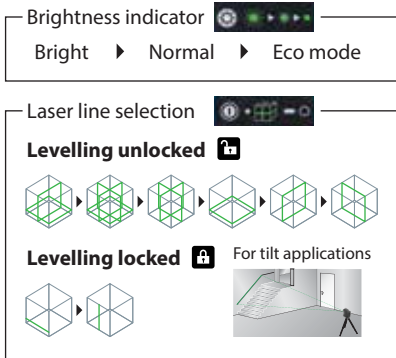

Powered by the following sources

12Vmax CXT Li-Ion battery
BL1041B (4.0Ah)



BL1021B (2.0Ah)
BL1016 (1.5Ah)



ADP09* loaded with eight AA batteries



eXtreme Protection Technology



Only the body of the Line laser is IP54 rated

*ADP09 is not available for USA market.

Accessories

Laser Receiver LDX1
Part No. LE00855702



Large soft bag
Part No. 832173-9



Min tripod
Part No. TK0LM1001F



Tripod 1800
Part No. TK0LM4001F



Tripod 2900
Part No. TK0LM5030F



Wall mount
Part No. LE00855706
Wall and ceiling adapter for universal applications with height adjustment function



Laser Series

SK105GD
SK106GD



SK105D
SK106D






SK105GD

SK106GD

SK105D

SK106D



Rechargeable Multi Line Laser

SK700GD / SK700D

Carrying Case

Leveling accuracy	±2 mm / 10 m
Self-leveling range	±4°
Laser type	SK700GD: Laser class 2: 510 - 530 nm SK700D: Laser class 2: 630 - 645 nm
Operating Temperature	-10 - 50°C
Protection class	IP54
Dimensions (L x W x H)	w/ BL1016/BL1021B: 149 x 104 x 153 mm (5-7/8 x 4-1/8 x 6") w/ BL1041B: 168 x 104 x 153 mm (6-5/8 x 4-1/8 x 6")
Net weight	0.99 - 1.2 kg (2.2 - 2.7 lbs.)

Standard Equipment : Target Plate, Adapter, Soft Bag

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE

PRINTED IN SINGAPORE