



40Vmax
mechanism
movie



This movie was filmed
in Japan.
Models and specs may
vary by country.

Satisfy Professional's Needs



Cordless Grass Trimmer
UR012G

Accessories

Trimmer head

Part No. 196324-1 Cord/Line : 2.4mm x3.6m Ref. : UN-74L	Part No. 197296-3 Cord/Line : 2.0mm x3m Ref. : ECO 4L	Part No. 199884-2 Cord/Line : 2.7mm Ref. : 105-M10L	Part No. 191D93-3 Cord/Line : 2.4mm Ref. : 121-M10L	Part No. 191D89-4 Cord/Line : 2.0mm x4m Ref. : 96-M10L	Part No. 198893-8 (EU) Cord/Line : 2.0mm x3m Ref. : 95-M10L
---	---	---	---	--	---



Four-leaf Spiral Nylon cord

Green	Orange	Red
Size	Size	Size
2.0mmx15m	2.4mmx15m	2.7mmx15m
2.0mmx30m	2.4mmx30m	2.4mmx30m
Part No. 197472-9	Part No. 198501-1	Part No. E-01828
Part No. 197473-7	Part No. 198502-9	Part No. E-01834
	Part No. E-01812	Part No. E-01840

Protection guard for brush cutting blades

Part No. 191B54-1



Plastic blade

Cutting width	Plastic blade Set	Replacement plastic blade
255mm	198383-1	198426-9

Shoulder strap assembly

Comfort
Part No.122A37-4



Charging Time

	DC40RA Fast Charging	DC40RC
BL4020 2.0Ah	22 min	30 min
BL4025 2.5Ah	28 min	38 min
BL4040 4.0Ah	45 min	67 min
*BL4050F 5.0Ah	50 min	85 min

*1 Recommended battery

Cordless Grass Trimmer

UR012G

- Variable Speed
- Brake
- Reversing
- Electronic 3-Speed
- Constant Speed
- Soft Start

Cutting Width	Nylon Cutting Head: 480 mm (18-7/8") Plastic Blade: 255 mm (10")
No Load Speed (RPM)	Nylon Cutting Head (3 / 2 / 1): 0 - 5,000 / 0 - 4,200 / 0 - 3,500
Spindle Size	M10 x 1.25 LH
Sound Pressure Level	Plastic Blade: 82.9 dB(A) / Nylon Cutting Head: 79.9 dB(A)
Sound Power Level	Plastic Blade: 92.4 dB(A) / Nylon Cutting Head: 91.6 dB(A)
Vibration Level	Left / Right: 2.5 / 2.5 m/s ² or less
Dimensions (L x W x H)	w/ BL4050F: 1,829 x 680 x 590 mm (72 x 26-3/4 x 23-1/4")
Net Weight	8.0 - 9.3 kg (17.6 - 20.5 lbs.)

Standard Equipment : Safety Goggles, Nylon Cutting Head / Plastic Blade (country-specific), Accessory Bag, Hex Wrench, Box Wrench, Shoulder Belt, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE

PRINTED IN SINGAPORE



As powerful as 40mL petrol grass trimmer



Wet Guard

Max Output
2.0 kW



40V^{Li-ion} max + 40V^{Li-ion} max
XGT X2
 80V^{max}

High power and large cutting width of 480mm similar to 40mL class engine grass trimmers



Multi functional control panel: near right hand position for easy access and operation

- Electronic 3-speed
- Reverse button / ADT
- Main power button

Reverse button

Reverse switch for clearing entangled weeds and grass from cutting head

Low noise level
96 or lower dB(A)
 with ø480mm nylon cutting head

Max Output
2.0 kW

- Toolless handle lock mechanism for good portability**
- New tool-less quick fastening handle holder**
- Rigid ø28mm shaft pipe**
is used for heavy-duty operation using Chisel blades or Shredder blades.
- The vertical center line of the handle bar always stays aligned with that of user**
- Large push button main power switch**
allows for easy on/off even with gloved hand.

Run Time (BL4050F x2)*

Nylon cutting head

High	Med	Low
22	42	106

min

*on a single full battery charge / No load

WG WET GUARD
 High water-resistance allows to operate the machine even if it is wet with water.


XPT eXtreme Protection Technology
 Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather



BL MOTOR
Rear end mounted motor
 Makes the tool weight balance similar to engine grass trimmers, enabling user to easily lift up the saw head for ridge weed removal, etc.



ADT Automatic torque Drive Technology
 Automatically changes the cutting speed according to grass density.

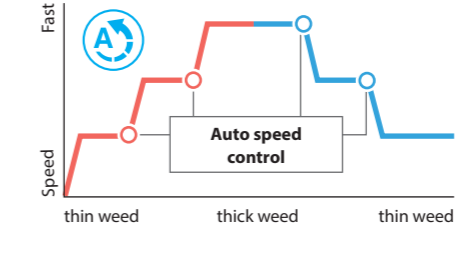

AFT Active Feedback sensing Technology
 Torque limiter turns the motor off if the tool is suddenly forced to lock

