



Cordless Ratchet Wrench DWR180 9.5 mm (3/8"), 6.35 mm (1/4")



Provides high speed fastening



Max fastening torque

47.5 N·m





Supplied with two socket adapters



Socket adapter
9.5 mm (3/8")
Part No.191A50-3

Socket adapter
6.35 mm (1/4")
Part No.191A51-1

Easy-to-grip small diameter grip for more comfort and control




Can also be used as a hand ratchet wrench



Forward / reverse rotation change

Turn the reversing lever to the A side for clockwise rotation or to the B side for counterclockwise rotation.

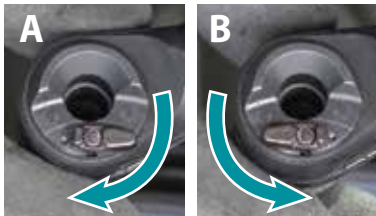

Able to tighten 13mm nut onto M8 threaded rod

13mm nut only



Single LED job light

with preglow and afterglow functions



Tool bag

Part No. 832074-1



Cordless Ratchet Wrench Series



Cordless Ratchet Wrench

DWR180 9.5 mm (3/8")

- Variable Speed
- Brake
- Reversing
- Built-in Job Light
- Carrying Case

Capacity	Standard Bolt: M5 - M12 (3/16 - 1/2") High Strength Bolt: M5 - M10 (3/16 - 3/8")
Square Drive	9.5 / 6.35 mm (3/8 / 1/4")
No Load Speed (RPM)	0 - 800
Max Fastening Torque	47.5 N-m (420 in.lbs.)
Vibration Level	2.5 m/s ²
Sound Pressure Level	74 dB(A)
Dimensions (L x W x H)	w/o Battery: 350 x 79 x 67 mm (13-3/4 x 3-1/8 x 2-5/8") w/ BL1815N / BL1820B: 369 x 79 x 69 mm (14-1/2 x 3-1/8 x 2-3/4") w/ BL1830B / BL1840B / BL1850B / BL1860B: 369 x 79 x 87 mm (14-1/2 x 3-1/8 x 3-7/16")
Net weight	1.2 - 1.6 kg (2.6 - 3.5 lbs.)

Standard Equipment : Socket Adapter, Battery, Charger, Tool Bag (Country-specific)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE

PRINTED IN SINGAPORE