Accessories

New nylon cord for better cutting performance

- New ingenious design:
- Spiral cord body with four-leaf clover-like cross section developed for better cutting performance
- High performance:
- More sharpness for 10% less noise and 15% less power consumption compared with conventional 2mm diameter cord with circular cross section

B&F Eco4

Part No. 197297-1(M8x1.25 RH) 197296-3(M10x1.25 LH)



Four-leaf clover-like cross section (ø 2.0mm)



197472-9 2.0mmx30m 197473-7 2.0mmx160m 197474-5 2.0mmx280m 197475-3



255mm Plastic blade (Optional accessory) Better cutting efficiency


Cuts 20-30% larger area than conventional Nylon cord cutter



Plastic blade Set Part No. 197188-6 with nut M8x1.25RH M8x1.25 LH M10x1.25 LH

Replacement plastic blade 12pcs. set Part No. 197189-4



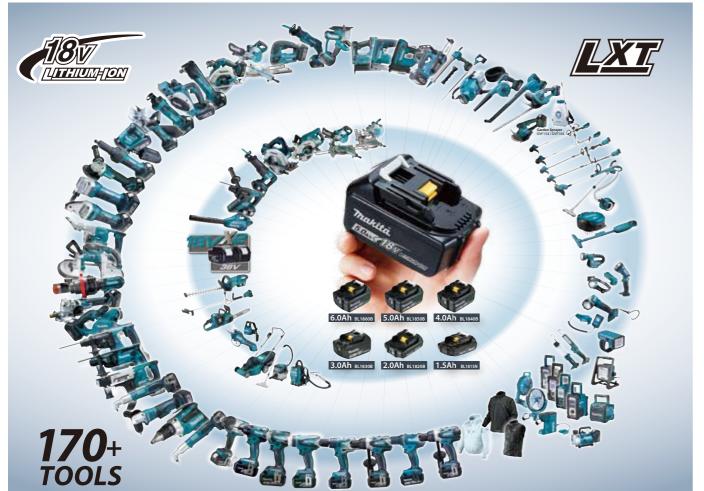

Cordless Grass Trimmer



Electronic 3-Speed (DUR365U)

Constant Speed

Reversing

Soft Start

Fast charger, Battery cartridge, Blade (DUR365U), Nylon cutting head (DUR364L), Universal guard, Shoulder harness with double shoulder strap, Wrenches

DUR365U / DUR364L

No load speed (rpm)

BL1830x2

1,823x610x460mm (71-3/4"x24"x18-1/8")

89dB(A)(nylon 1,797x310x229mm (70-3/4"x12-1/4"x9") 4.5kg (9.9lbs) 4.0kg (8.8lbs)

DUR364L

Low: 5,000 / High: 6,500

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348 Phone: +65-6546-8700 Fax: +65-6546-8711 Email: salesadv@makita.com.sq Website: www.makita.com.sg Facebook: www.facebook.com/MakitaSG





550W 5.2kg (11.6lbs)

VISIT OUR WEBSITE

Item code: Z-10358



High power and more work thanks to New **Brushless motor**

Low

Sound power level

86dB(A) / 89dB(A) noise DUR365U / DUR364L (nylon)

The best choices for use in Resorts, Public Places and Residential Areas.











Dual battery fuel gauge of 3 LEDs

Constant speed control

- minimizes reduction in rotation speed under load, keeping operation efficiency.
- · Lowers noise under no load.

Powered by two 18V Li-ion batteries in series



Two 18V Li-ion batteries can be directly installed on the machine to supply energy to the powerful 36V DC motor drive system.

5.0Ahx2 Low speed mode: 490min DUR365U with metal blade (in no load)

| Continuous use (min) (Two 18V Li-ion batteries) | | BL1815N (1.5Ah) | BL1820 (2.0Ah) | BL1830 (3.0Ah) | BL1840 (4.0Ah) | BL1850 (5.0Ah) |
|--|--------|--------------------|-------------------|-------------------|-------------------|-------------------|
| DUR365U with Metal blade (in no load) | Low | 155 | 210 | 300 | 390 | 490 |
| | Middle | 65 | 90 | 130 | 175 | 220 |
| | High | 40 | 55 | 80 | 115 | 145 |
| DUR364L with Nylon cord (in no load) | Low | 30 | 40 | 55 | 75 | 100 |
| | High | 15 | 20 | 28 | 35 | 45 |
| Charging time DC18RD | | 15 | 24 | 22 | 36 | 45 |





Extreme Protection Technology

For use in outdoor applications or harsh environments, protection from dust and dripping water is enhanced.





DUR364L

350mm nylon cutting head rotating clockwise

